ReQuest
SERIOUS PLAY

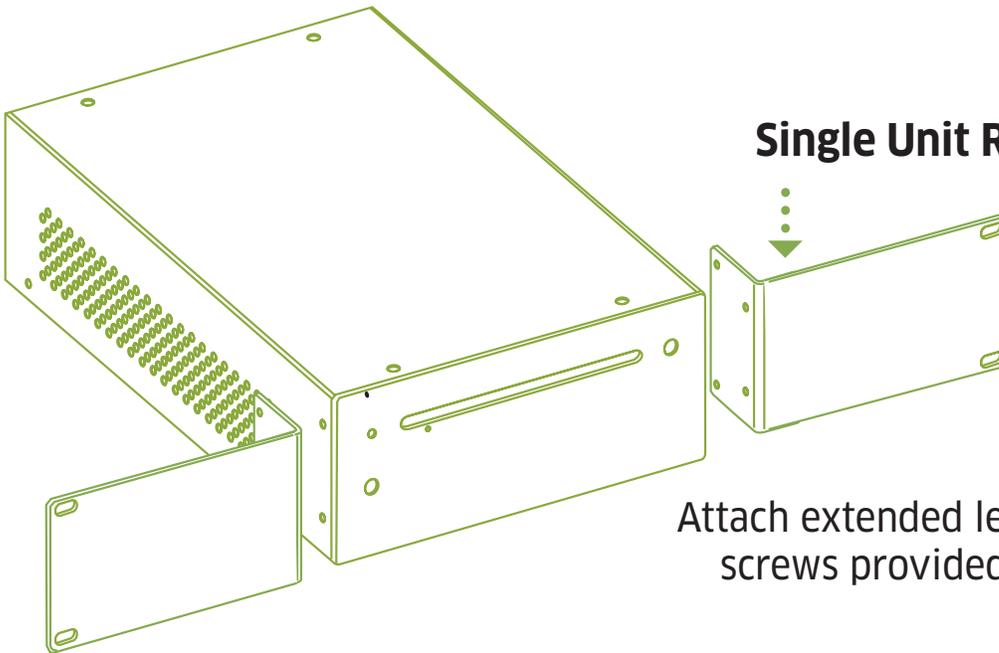## Configuring Your IMC for use with an F.Series or iQ

1 Connect your system according to any of the wiring guides on the other side of this guide.

2 Make sure your ReQuest server is powered on and connected to the network before connecting and powering up the IMC.

3 On first run, the IMC will begin cycling through video modes, changing once every 15 seconds. Confirm the mode that works best with your TV.

4 The connected TV will display a message that the "server was not found" or "this panel is not configured". Close this dialogue to proceed.

5 Move your cursor down to the "ReQuest Server IP" Box. Delete 0.0.0.0 and enter your ReQuest server's IP address using the onscreen keypad.

6 Click on "Close" then "Save" and your IMC will reboot. After reboot, the IMC will be configured and ready for use!

iQ Only

7 On a networked computer, browse to the iQ system's webserver and click "iQ Configuration" in the bottom menu.

8 Click on "Rooms". Once there, drag the IMC to the appropriate room with a speaker and your IMC will be ready to use!

Single Unit Rack Mounting

Attach extended length ears as normal using screws provided in the chassis.

Quick Tips

Factory Defaults

To reset your IMC to factory defaults, aim your remote at the IMC and click:

▲ then ▶▌ three times.

The unit will reboot and return to factory defaults.

Settings Page

If you find yourself stuck at any point, you can quickly get back to the settings page by clicking the

"home" button 🏠 five times

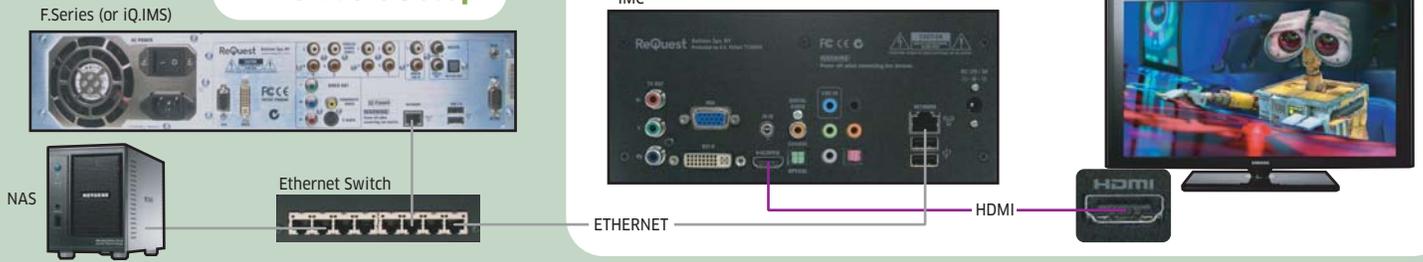on your IMC remote. This will work from any screen.

Screen Resolution

Any time you make a change to your screen resolution mode, your IMC will cycle through all modes (720, 1080i, 1080p, 480p) for 15 seconds at a time until you select one that works. This prevents the IMC from getting stuck on the wrong mode for your TV.
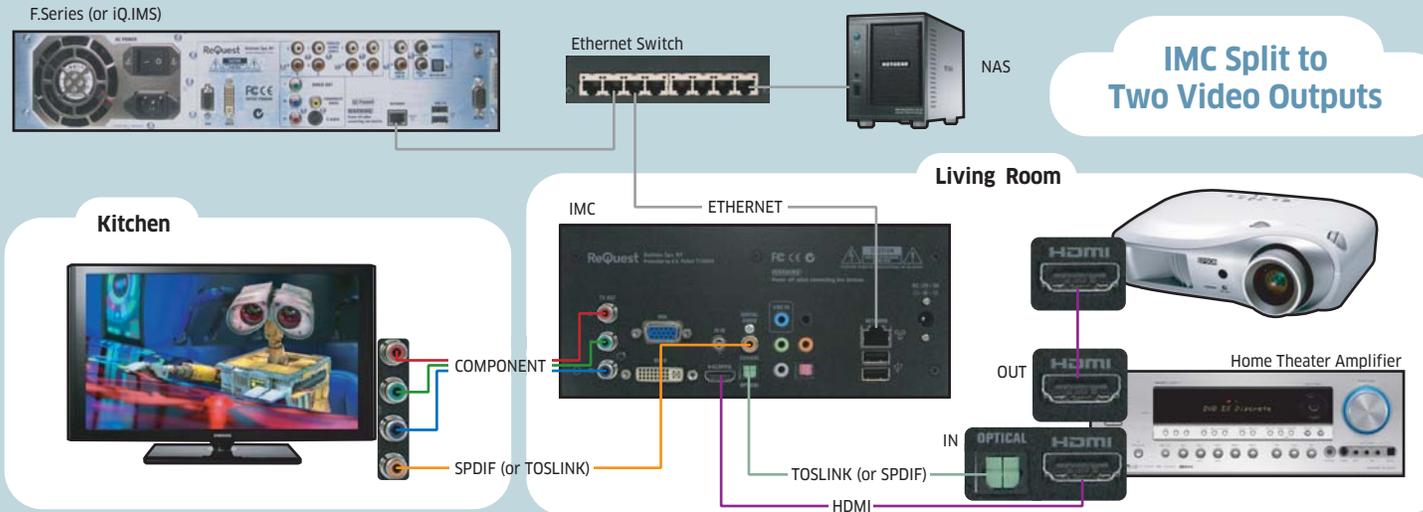
The default password for parental settings is: 1111

ReQuest
SERIOUS PLAY

IMC Quick Start Wiring Guides

All of the following scenarios can be duplicated up to four times per ReQuest server using multiple IMC units connected to the same home network.
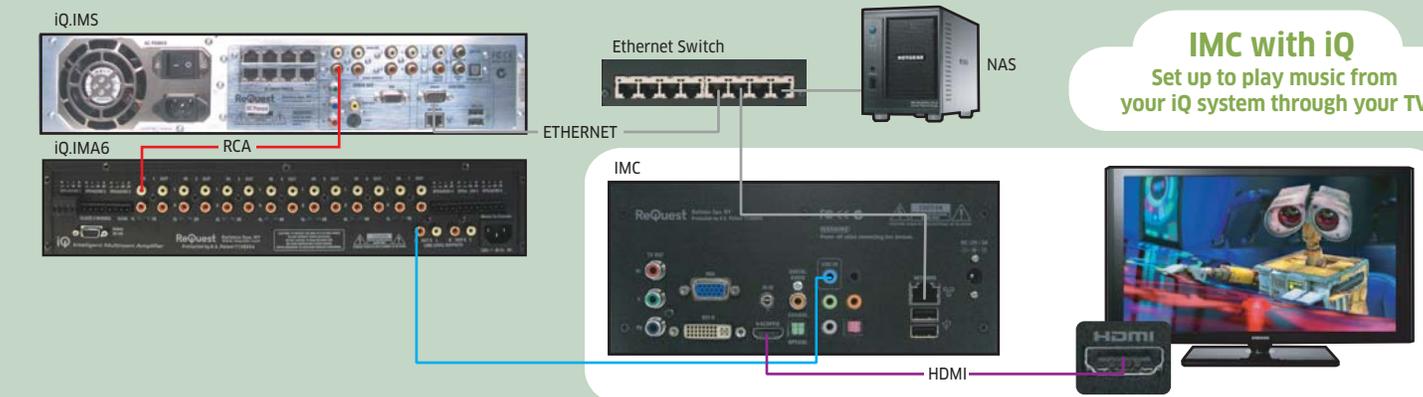
IMC Basic Setup

F.Series (or iQ.IMS)

IMC

NAS

Ethernet Switch

ETHERNET

HDMI

IMC Split to Two Video Outputs

F.Series (or iQ.IMS)

Ethernet Switch

NAS

Living Room

Kitchen

IMC

ETHERNET

COMPONENT

OUT

Home Theater Amplifier

SPDIF (or TOSLINK)

IN   OPTICAL

TOSLINK (or SPDIF)

HDMI

IMC with iQ
Set up to play music from your iQ system through your TV

iQ.IMS

iQ.IMA6

RCA

ETHERNET

Ethernet Switch

NAS

IMC

HDMI

IMC with Video Distribution

Living Room

Kitchen

IR Junction

IR Sensor

Den

IR Sensor

Patio

IR Sensor

OPTICAL   HDMI

Component Distribution

COMPONENT

IMC

Audio Distribution

HDMI

TOSLINK (or SPDIF)

SPDIF (or TOSLINK)